
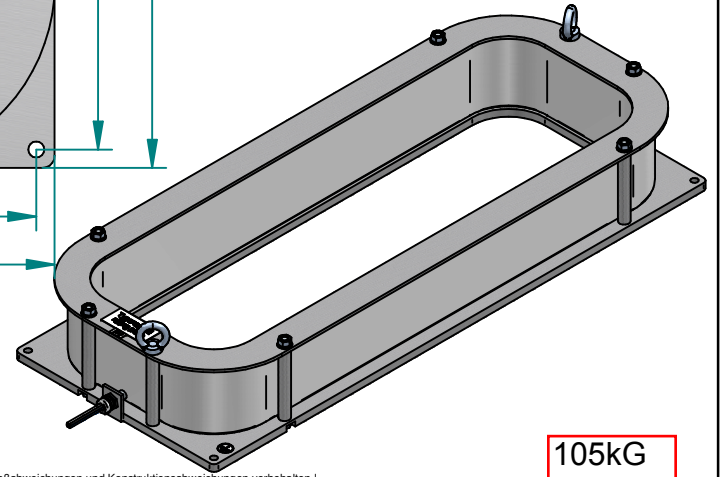


farbige Sek. Ausleitung 4mm²; Länge 3m
colored sec. wire 4mm², length 3m

- Ratio:100/1A
- Burden:1,2VA
- Class: 5P10
- Phase displacement:
- <120 minutes@0,01xIn
- f=50Hz
- Indoor use: -5°C - 45°C
- IEC61869-2

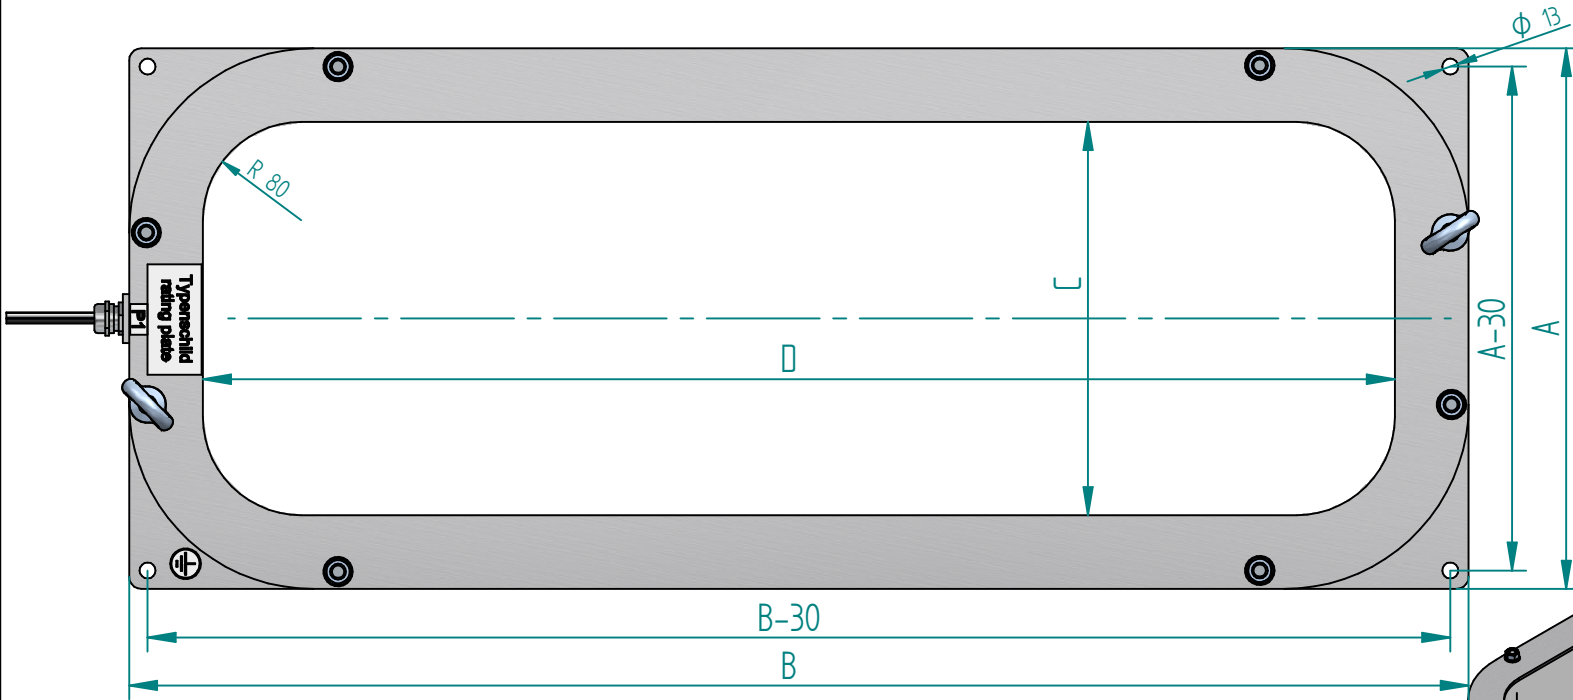

105kg

dimensions	
A	
B	
C	
D	
H	

Geringe Maßabweichungen und Konstruktionsabweichungen vorbehalten!
Minor deviations in dimension and construction are possible!

<small>mastering electricity worldwide</small>	Verwendungsbereich/ Field of application:	Innenraumaufstellung/ indoor use	Gewicht/ Weight	ca: kg	
	SBB bandagierter-Stromwandler in bandaged current transformer in assembly set		500x300		
Designed	Date	Hohn	30.04.2015	AA33 1 001 A	
Controlled	Date	Kath	30.04.2015		
Status	Alteration	Date	Name	Norm/Standard:ISO 2768-c	Ersatz für/Replaces: ZN



A3
1:1